

Cu/PVC/PVC

IEC 60502

Description :


Unarmoured control cable with copper conductor & PVC insulation.
For controlling, operating and signalling.

<i>Number of Cores & Cross Selection mm²</i>	<i>Insulation Thickness mm</i>	<i>Sheath Thickness mm</i>	<i>Cable Diameter Approx. mm</i>	<i>Total Weight Approx. kg/km</i>
5 x 1.5 RE	0.8	1.8	14.3	278
7 x 1.5 RE	0.8	1.8	13.1	239
8 x 1.5 RE	0.8	1.8	14.5	272
10 x 1.5 RE	0.8	1.8	16.1	327
12 x 1.5 RE	0.8	1.8	16.6	373
16 x 1.5 RE	0.8	1.8	18.2	469
18 x 1.5 RE	0.8	1.8	19.2	519
20 x 1.5 RE	0.8	1.8	20.2	569
24 x 1.5 RE	0.8	1.8	22.2	669
30 x 1.5 RE	0.8	1.8	23.4	803
40 x 1.5 RE	0.8	1.8	26.2	1035
61 x 1.5 RE	0.8	1.9	31.7	1527

1-Solid Conductor 2-PVC Insulation (Sequentially numbered for identification) 3-Extruded PVC Filler 4-PVC Sheathing.

Maximum conductor temperature: 70°C

Conductor cross-section of 1 and 2.5 mm² are also available.

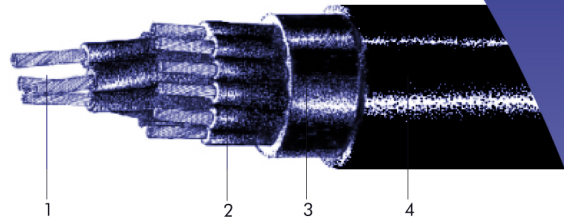

Cu/PVC/PVC

IEC 60502

Description :

Unarmoured control cable with copper conductor & PVC insulation.
For controlling, operating and signalling.

<i>Number of Cores & Cross Selection mm²</i>	<i>Insulation Thickness mm</i>	<i>Sheath Thickness mm</i>	<i>Cable Diameter Approx. mm</i>	<i>Total Weight Approx. kg/km</i>
5 x2.5 RM	0.8	1.8	16.2	373
7 x2.5 RM	0.8	1.8	15.2	338
8 x2.5 RM	0.8	1.8	16.9	385
10 x2.5 RM	0.8	1.8	18.9	466
12 x2.5 RM	0.8	1.8	19.6	536
16 x2.5 RM	0.8	1.8	21.6	682
18 x2.5 RM	0.8	1.8	22.7	756
20 x2.5 RM	0.8	1.8	23.9	831
24 x2.5 RM	0.8	1.8	26.4	981
30 x2.5 RM	0.8	1.8	27.9	1187
40 x2.5 RM	0.8	1.9	31.8	1553
61 x2.5 RM	0.8	2.1	38.4	2321

1-Stranded Circular Conductor 2-PVC Insulation (Sequentially numbered for identification) 3-Extruded PVC Filler 4-PVC Sheathing.

Maximum conductor temperature: 70°C

Conductor cross-section of 1.5 mm² are also available.