

Cu/XLPE/PVC

IEC 60245

Description:


Unarmoured control cable with copper conductor & XLPE insulation.
For controlling, operating and signalling.

Number of Cores & Cross Selection mm ²	Insulation Thickness mm	Sheath Thickness mm	Cable Diameter Approx. mm	Total Weight Approx. kg/km
5 x1.5 RE	0.7	1.8	13.8	257
7 x1.5 RE	0.7	1.8	12.5	215
8 x1.5 RE	0.7	1.8	13.8	244
10 x1.5 RE	0.7	1.8	15.3	293
12 x1.5 RE	0.7	1.8	15.7	332
6 x1.5 RE	0.7	1.8	17.3	417
18 x1.5 RE	0.7	1.8	18.1	460
20 x1.5 RE	0.7	1.8	19.0	504
24 x1.5 RE	0.7	1.8	21.0	592
30 x1.5 RE	0.7	1.8	22.1	708
40 x1.5 RE	0.7	1.8	24.7	909
61 x1.5 RE	0.7	1.9	29.9	1338

1-Solid Conductor 2-XLPE Insulation (Sequentially numbered for identification) 3-Extruded PVC Filler 4-PVC Sheathing.

Maximum conductor temperature: 90°C

Conductor cross-section of 1 and 2.5 mm² are also available.

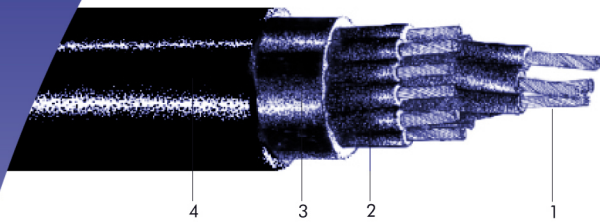

Cu/XLPE/PVC

IEC 60245

Description:

Unarmoured control cable with copper conductor & XLPE insulation.
For controlling, operating and signalling.

Number of Cores & Cross Selection mm²	Insulation Thickness mm	Sheath Thickness mm	Cable Diameter Approx. mm	Total Weight Approx. kg/km
5 x2.5 RM	0.7	1.8	15.7	347
7 x2.5 RM	0.7	1.8	14.6	308
8 x2.5 RM	0.7	1.8	16.2	350
10 x2.5 RM	0.7	1.8	18.1	424
12 x2.5 RM	0.7	1.8	18.7	486
16 x2.5 RM	0.7	1.8	20.6	616
18 x2.5 RM	0.7	1.8	21.7	683
20 x2.5 RM	0.7	1.8	22.9	750
24 x2.5 RM	0.7	1.8	25.2	884
30 x2.5 RM	0.7	1.8	26.6	1067
40 x2.5 RM	0.7	1.8	30.1	1381
61 x2.5 RM	0.7	2.0	36.4	2063

1-Stranded Circular Conductor 2-XLPE Insulation (Sequentially numbered for identification) 3-Extruded PVC Filler 4-PVC Sheathing.

Maximum conductor temperature: 90°C

Conductor cross-section of 1 and 1.5 mm² are also available.