

Cu/XLPE/Bd/SWA/PVC

IEC 60245

Description:

Wire armoured control cable with copper conductor & XLPE insulation.


For controlling, operating and signalling.

<i>Number of Cores & Cross Selection mm²</i>	<i>Insulation Thickness mm</i>	<i>Armour Diameter mm</i>	<i>Sheath Thickness mm</i>	<i>Cable Diameter Approx. mm</i>	<i>Total Weight Approx. kg/km</i>
5 x1.5 RE	0.7	0.8	1.8	15.4	425
7 x1.5 RE	0.7	0.8	1.8	16.3	467
8 x1.5 RE	0.7	1.25	1.8	18.5	652
10 x1.5 RE	0.7	1.25	1.8	20.1	738
12 x1.5 RE	0.7	1.25	1.8	20.5	789
16 x1.5 RE	0.7	1.25	1.8	22.1	921
18 x1.5 RE	0.7	1.25	1.8	22.9	987
20 x1.5 RE	0.7	1.6	1.8	24.5	1193
24 x1.5 RE	0.7	1.6	1.8	26.5	1356
30 x1.5 RE	0.7	1.6	1.8	27.6	1510
40 x1.5 RE	0.7	2.0	1.9	31.5	2017
61 x1.5 RE	0.7	2.0	2.0	37.0	2734

1-Solid Conductor 2-XLPE Insulation (Sequentially numbered for identification) 3-Extruded PVC Bedding 4-Galvanized Steel Wire Armour 5-PVC Sheathing.

Maximum conductor temperature: 90°C

Conductor cross-section of 1 and 2.5 mm² are also available.

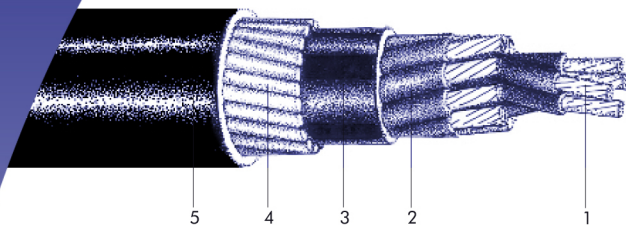

Cu/XLPE/Bd/SWA/PVC

IEC 60502

Description:

Wire armoured control cable with copper conductor & XLPE insulation.

For controlling, operating and signalling.

<i>Number of Cores & Cross Selection mm²</i>	<i>Insulation Thickness mm</i>	<i>Armour Diameter mm</i>	<i>Sheath Thickness mm</i>	<i>Cable Diameter Approx. mm</i>	<i>Total Weight Approx. kg/km</i>
5 x2.5 RM	0.7	0.8	1.8	17.3	542
7 x2.5 RM	0.7	1.25	1.8	19.4	739
8 x2.5 RM	0.7	1.25	1.8	21.0	829
10 x2.5 RM	0.7	1.25	1.8	22.9	951
12 x2.5 RM	0.7	1.25	1.8	23.5	1036
16 x2.5 RM	0.7	1.6	1.8	26.1	1362
18 x2.5 RM	0.7	1.6	1.8	27.2	1466
20 x2.5 RM	0.7	1.6	1.8	28.4	1588
24 x2.5 RM	0.7	2.0	1.8	31.7	2005
30 x2.5 RM	0.7	2.0	1.9	33.4	2261
40 x2.5 RM	0.7	2.0	2.0	37.0	2762
61 x2.5 RM	0.7	2.0	2.2	43.8	3749

1-Stranded Circular Conductor 2-XLPE Insulation (Sequentially numbered for identification) 3-Extruded PVC Bedding 4-Galvanized Steel Wire Armour 5-PVC Sheathing.

Maximum conductor temperature: 90°C

Conductor cross-section of 1 and 1.5 mm² are also available.